



**VHT**®

HIGH PERFORMANCE COATINGS



# HIGH HEAT JUST GOT HOTTER!

It's always been about the heat at VHT. Now we've rolled out new packaging and improved your project results with the new Danvern® EZ Touch nozzle. So now you'll get even hotter results ... but we didn't change what you've come to expect from VHT ... "Extreme High Heat Performance". Through the years, the VHT brand has been the motorsport enthusiasts' choice for high-heat applications. It could withstand such extreme high-heat temperatures that it found its way into the space program and was used on space bound and atmospheric re-entry spacecraft. It doesn't get much hotter than that. Our FlameProof™ line can withstand temperatures of up to 2000°F ... perfect for your exhaust systems, turbo housings, piston domes and exhaust valves.

VHT also offers other High Heat products for applications ranging from 250°F (121°C) - 900° F (482°C): High Temp Engine Enamel™, Caliper Paint, Wheel Paint, Wrinkle Plus™ and Roll Bar & Chassis.

VHT's complete line-up includes products for your automotive exterior and interior dress-up applications. Check it out in the pages of this catalog ... Or hit [vhtpaint.com](http://vhtpaint.com) to learn more!

# VHTlak.nl



# WHAT'S INSIDE

<b>VHT FLAMEPROOF™ COATING</b> .....	<b>4</b>
<b>VHT ENGINE METALLIC™</b> .....	<b>6</b>
<b>VHT ENGINE ENAMEL™</b> .....	<b>7</b>
<b>VHT WRINKLE PLUS™ COATINGS</b> .....	<b>8</b>
<b>VHT CALIPER PAINT</b> .....	<b>9</b>
<b>VHT ANODIZED COLOR COAT</b> .....	<b>10</b>
<b>VHT WHEEL PAINT</b> .....	<b>11</b>
<b>VHT ROLL BAR &amp; CHASSIS PAINT</b> .....	<b>12</b>
<b>VHT STRIP FAST™</b> .....	<b>12</b>
<b>VHT RUST CONVERTOR</b> .....	<b>13</b>
<b>VHT EPOXY ALL WEATHER PAINT</b> .....	<b>13</b>
<b>VHT HOOD, BUMPER &amp; TRIM PAINT</b> .....	<b>14</b>
<b>VHT PLATE FINISH™</b> .....	<b>14</b>
<b>VHT NITE-SHADES™</b> .....	<b>15</b>
<b>VHT VINYL DYE™</b> .....	<b>16</b>
<b>VHT COPPER GASKET CEMENT</b> .....	<b>16</b>
<b>VHT PRIME COAT™</b> .....	<b>17</b>
<b>VHT QUICK COAT™</b> .....	<b>17</b>
<b>VHT BLACK OXIDE CASE PAINT</b> .....	<b>18</b>
<b>VHT BARREL SPRAY PAINT</b> .....	<b>18</b>

VHTlak.nl

Flat Gray Primer  
SP100  
0-10155-00100-5

Flat White  
SP101  
0-10155-00101-2

Flat Black  
SP102  
0-10155-00102-9

Flat Gray  
SP104  
0-10155-00104-3

Flat Silver  
SP106  
0-10155-00106-7

Flat Yellow  
SP108  
0-10155-00108-1

Flat Red  
SP109  
0-10155-00109-8

Flat Blue  
SP110  
0-10155-00110-4


Flat Orange  
SP114  
0-10155-00114-2

Satin Clear  
SP115  
0-10155-00115-9

Flat Aluminum  
SP117  
0-10155-00117-3

Flat White Primer  
SP118  
0-10155-00118-0

Nu-Cast™ Cast Iron  
SP998  
0-10155-00998-8

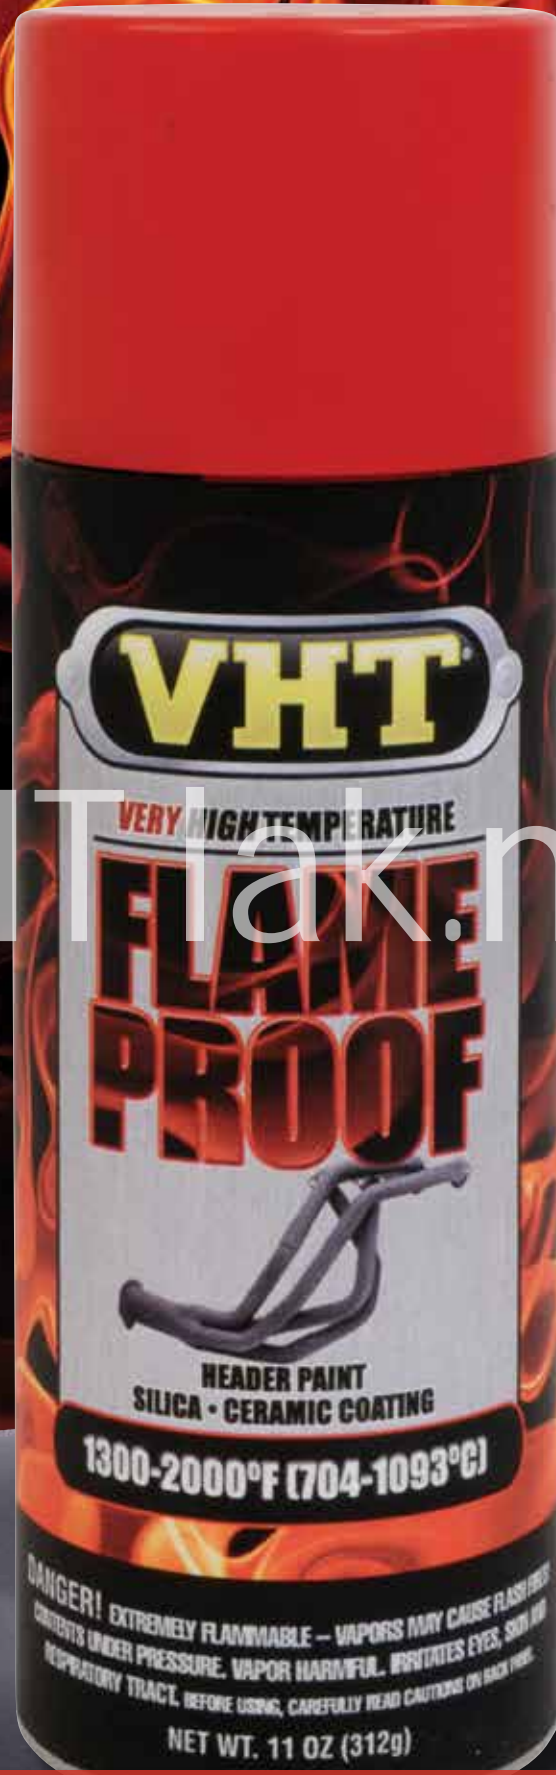

VHTlak.nl

# VHT FLAMEPROOF™ COATING

VHT FlameProof™ Coating will renew and extend the life of any surface exposed to extremely high temperatures. This unique coating is a matte finish, silicone ceramic base widely used by the automotive industry on exhaust systems and the aerospace industry for jet engines, re-entry vehicles and other high temperature applications. VHT FlameProof™ Coating will withstand temperatures up to 2000°F (1093°C) and is ideal for use on headers, exhaust systems, or wherever an extreme temperature coating is needed.

11 oz can — Case pack: 6

---

**Temperature:** 1300°F-2000°F (704°C-1093°C)

---

**Applications:** Headers, Exhaust Manifolds, Piston Domes,  
Inside Heads

---

**Finish:** Flat

---

**Dry Time:** Curing time required and can be done on or off  
vehicle (see below)

---

## Curing FlameProof™

VHT FlameProof™ Coating only attains its unique properties after correct curing (refer to instructions on the can).

### On the Vehicle

- Paint must be completely dry before curing
- Run at idle for 10 minutes
- Cool for 20 minutes
- Run at idle for 20 minutes
- Cool for 20 minutes
- Run under normal operating conditions for 30 minutes

### Off the Vehicle

- Paint must be completely dry before curing
- Heat to 250°F (121°C) for 30 minutes
- Cool for 30 minutes
- Heat to 400°F (204°C) for 30 minutes
- Cool for 30 minutes
- Heat to 650°F (343°C) for 30 minutes

**CAUTION:** Do not exceed the temperature of the least heat tolerant component or the base metal

**Coating System** VHT provides a multi-high performance coating system for the ultimate in protection and quality. The system includes surface preparation, primer, paint and clear coat.

---

<b>Prep</b>	SP575	Strip Fast
<b>Prime</b>	SP118	FlameProof™ Primer
<b>Coat</b>	SPXXX	FlameProof™ Color
<b>Finish</b>	SP115	FlameProof™ Clear

---

# VHT ENGINE METALLIC™

Under hood engine dress-up never looked this good, or stood up to high-heat temperatures like VHT Engine Metallic™ Paint. Formulated for high temperature and high performance applications, VHT Engine Metallic Paint™ creates a cool sparkling metallic finish and withstands intermittent temperatures of up to 650°F (343°C). A unique formulation of urethane and ceramic resins produces a tough and long lasting finish for engines, engine accessories, or any other surface that requires a durable, heat and chemical resistant finish.

11 oz can — Case pack: 6

**Temperature:** 650°F (343°C)

**Applications:** Headers, Engine Blocks, Starters, Brackets, Water Pumps, Valve Cover, Transmissions, Differential Covers

**Finish:** Flat Metallic

**Dry Time:** Dries to the touch in 30 mins.  
Dries thoroughly overnight.

## Curing Engine Metallic™

VHT Engine Metallic™ only attains its unique properties after correct curing.

- Bake at 200°F (93°C) for 20 min
- The inherent heat of engine operation will also accomplish curing.

**Coating System** VHT provides a multi-high performance coating system for the ultimate in protection and quality. The system includes surface preparation, primer, paint and clear coat.

<b>Prep</b>	SP575	Strip Fast
<b>Prime</b>	SP148	Engine Primer (Optional - 550°F)
<b>Coat</b>	SPXXX	Engine Metallic™
<b>Clear</b>	SPXXX	Engine Clear (Optional - 550°F)

Red Fire SP401 0-10155-46207-3	
Burnt Copper SP402 0-10155-46208-0	
Titanium Silver Blue SP403 0-10155-46209-7	
Gold Flake SP404 0-10155-46210-3	
Black Pearl SP405 0-10155-00007-7	



 Motor Brite - Clear Engine Enamel SP29 0-10155-00029-9	 Ford Gray SP137 0-10155-00137-1
 Chevy Orange Red SP119 0-10155-00119-7	 New Ford Blue SP138 0-10155-00138-8
 Chrysler Hemi-Orange SP120 0-10155-00120-3	 GM Satin Black SP139 0-10155-00139-5
 Universal Bright Red SP121 0-10155-00121-0	 Gloss Clear SP145 0-10155-00145-6
 Pontiac Blue SP122 0-10155-00122-7	 Light Gray Primer SP148 0-10155-00148-7
 Chevy Orange SP123 0-10155-00123-4	 Racing Green SP151 0-10155-04443-9
 Gloss Black SP124 0-10155-00124-1	 Ford Red SP152 0-10155-04442-2
 Ford Dark Blue SP125 0-10155-00125-8	 Old Ford Blue SP153 0-10155-00016-9
 Early c Blue SP126 0-10155-00126-5	 Grabber Green SP154 0-10155-00015-2
 Universal Aluminum SP127 0-10155-00127-2	 Chrysler Red SP155 0-10155-00017-6
 Gloss Yellow SP128 0-10155-00128-9	 Competition Ford Blue SP755 0-10155-00755-7
 Gloss White SP129 0-10155-00129-6	 Kermit Green SP760 0-10155-00760-1
 Flat Black SP130 0-10155-00130-2	 Concourse Ford Blue SP761 0-10155-00761-8
 Ford Green SP131 0-10155-00131-9	 Nu-Cast™ Aluminum SP995 0-10155-00995-7
 Universal Gold SP132 0-10155-00132-6	 Nu-Cast™ Cast Iron SP997 0-10155-00997-1
 Ford Light Blue SP134 0-10155-00134-0	 GM Holden Blue SP1202 0-10155-01202-5
 GM Blue SP135 0-10155-00135-7	

# VHT ENGINE ENAMEL™

VHT 550°F (288°C) Engine Enamels™ are available in a wide range of colors, including exact match factory colors. All colors have excellent durability and superior heat and chemical resistance. They are specially formulated to withstand corrosion, rust, salt spray, chemicals and additives of today's gasoline blends and degreasers. VHT 550°F (288°C) Engine Enamels™ are a unique blend of urethane and ceramic resins, which produce a tough and long-lasting finish for engines, engine accessories or wherever a tough durable heat or chemical resistant finish is needed.

11 oz can — Case pack: 6

**Temperature:** 550°F (288°C)

**Applications:** Headers, Engine Blocks, Starters, Brackets, Water Pumps, Valve Cover, Transmissions, Differential Covers

**Finish:** Flat, Satin, Gloss and Metallic

**Dry Time:** Dries to the touch in 30 mins.  
Dries thoroughly overnight.

## Curing Engine Enamel

VHT Engine Enamel only attains its unique properties after correct curing.

- Bake at 200°F (93°C) for 20 min
- The inherent heat of engine operation will also accomplish curing.

**Coating System** VHT provides a multi-high performance coating system for the ultimate in protection and quality. The system includes surface preparation, primer, paint and clear coat.

<b>Prep</b>	SP575	Strip Fast
<b>Prime</b>	SP148	Engine Primer
<b>Coat</b>	SPXXX	Engine Color
<b>Clear</b>	SPXXX	Engine Clear



# VHT WRINKLE PLUS™ COATINGS

VHT Wrinkle Plus™ combines strong colors with a deep rich texture for a custom look. It is temperature resistant to 350°F (177°C) and is ideal for adding a touch of personal styling to almost any metal surface. VHT Wrinkle Plus™ resists color fading, grease, degreasers and severe weather conditions. This tough durable finish is extremely resistant to rust, corrosion, chipping and cracking.

11 oz can — Case pack: 6

---

**Temperature:** 350°F (177°C)

---

**Applications:** Valve Covers, Metal Dashboards, Glove Boxes, Starters, Door Panels, Shifters, Alternators, Firewalls

---

**Finish:** Flat

---

**Dry Time:** Dries within 24 hrs.

---

## Curing Wrinkle Plus™

VHT Wrinkle Plus™ only attains its unique properties after correct curing.

- Bake at 200°F (93°C) for 20 min.
- The inherent heat of engine operation will also accomplish curing.

**Coating System** VHT provides a multi-high performance coating system for the ultimate in protection and quality. The system includes primer and paint.

---

**Prime** SP148 Engine Prime

---

**Coat** SPXXX Wrinkle Plus™ Color

---

Black  
SP201  
0-10155-00201-9



Red  
SP204  
0-10155-00204-0





-  Caliper Cleaner  
SP700  
0-10155-52490-0
-  Gloss Clear  
SP730  
0-10155-00730-4
-  Real Red  
SP731  
0-10155-00731-1
-  Bright Blue  
SP732  
0-10155-00732-8
-  Real Orange  
SP733  
0-10155-00733-5

-  Gloss Black  
SP734  
0-10155-00734-2
-  Cast Aluminum  
SP735  
0-10155-00735-9
-  Gold  
SP736  
0-10155-00736-6
-  Bright Yellow  
SP738  
0-10155-00738-0
-  Satin Black  
SP739  
0-10155-00739-7



# VHT CALIPER PAINT

VHT Brake, Caliper, Drum & Rotor Coatings have been specifically designed for the custom detailing of brake components. It is heat resistant to 900°F (482°C) and will not chip, crack, fade or rust even under extremes of operation or road and weather conditions. It is easy to apply, dries quickly and is remarkably resistant. Careful preparation is essential.

11 oz can — Case pack: 6

**Temperature:** 900°F (482°C)

**Applications:** Brake Calipers, Rotors, Brake Drums

**Finish:** Satin and Gloss

**Dry Time:** Dries to touch in 30 mins.  
Dries thoroughly overnight.

## Curing Caliper Paint

VHT Caliper Paint only attains its unique properties after correct curing.

- Bake at 200°F (93°C) for 20 min.
- The inherent heat of braking operation will also accomplish curing.

**Coating System** VHT provides a multi-high performance coating system for the ultimate in protection and quality. The system includes prep, primer, paint and clear coat.

<b>Prep</b>	SP700	Caliper Cleaner
<b>Prime</b>	SP118	Flame Proof Primer
<b>Coat</b>	SPXXX	Brake Color
<b>Finish</b>	SP730	Gloss Clear

**DANGER!** EXTREMELY FLAMMABLE — VAPORS MAY CAUSE FLASH-FIRES  
CONTENTS UNDER PRESSURE — IRRITATES EYES, SKIN AND

# VHT ANODIZED COLOR COAT

Now DIYers can create an anodized look under their hoods. This unique transparent coating creates an anodized effect over properly prepared chrome, shiny bare metal and faux chrome-like surfaces for a spectacular metallic finish. VHT Anodized Color Coat is formulated for high temperature and high performance engine paint applications. It withstands intermittent temperatures up to 550°F (228°C).

## VHT ANODIZED BASE COAT

To create the anodized metal look over non-metal and/or painted surfaces, first prime with VHT Anodized Base Coat. Then apply VHT Anodized Color Coat when dry.

11 oz can — Case pack: 6

---

**Temperature:** 550°F (228°C)

---

**Applications:** Engine Components, Chrome Wheels, Bumpers, Trim, Accessories

---

**Finish:** Translucent Gloss Color

---

**Dry Time:** Dries to the touch in 30 mins.  
Dries thoroughly overnight.  
No curing required.

---

**Coating System** VHT provides a multi-high performance coating system for the ultimate in protection and quality. The system includes a recommended adhesion promoter, paint and clearcoat.

---

<b>Coat</b>	SPXXX	Anodized Color
<b>Clear</b>	SP145	Engine Gloss Clear

---

Anodized Red  
SP450  
0-10155-46211-0



Anodized Blue  
SP451  
0-10155-46212-7



Anodized Purple  
SP452  
0-10155-46213-4



Anodized Base Silver  
SP453  
0-10155-46214-1



Aluminum  
SP181  
0-10155-00181-4

Satin Black  
SP183  
0-10155-00183-8

Clear Coat  
SP184  
0-10155-00184-5

Chevy Rally Silver  
SP186  
0-10155-00186-9

Gloss Black  
SP187  
0-10155-00187-6

Ford Argent Silver  
SP188  
0-10155-00188-3

Graphite  
SP189  
0-10155-00018-3



# VHT WHEEL PAINT

VHT Wheel Paint provides a great finish and real protection for all standard and custom wheels. Every day wheels take a beating both on and off the road. Salt, sand, brake dust and rocks severely damage the appearance and protection of the wheel surface. This unique product resists chipping, cracking and fading, while protecting the wheel surface from oxidation, and is available in five popular colors plus clear coat.

11 oz can — Case pack: 6

**Temperature:** 250°F (121°C)

**Applications:** Aluminum Wheels, Steel Wheels,  
Wheel Covers, Center Caps

**Finish:** Satin and Gloss

**Dry Time:** Dries to the touch in 30 mins.  
Dries thoroughly overnight.  
No curing required.

**Coating System** VHT provides a multi-high performance coating system for the ultimate in protection and quality. The system includes primer, paint and clear coat.

**Prime** SP148 Engine Primer

**Coat** SPXXX Wheel Paint Color

**Clear** SP184 Clear Coat

VHT lak.nl

## VHT ROLL BAR & CHASSIS PAINT

VHT Roll Bar & Chassis Paint is a one step epoxy coating that does not require primer. It gives the appearance of a tough baked-on finish that is chemical, corrosion, rust and salt resistant.

11 oz can — Case pack: 6

**Temperature:** 250°F (121°C)

**Applications:** Frame & Chassis, Shop Racks, Tools & Equipment, Trailers

**Finish:** Gloss and Satin

**Dry Time:** Dries to the touch in 30 mins.  
Dries thoroughly overnight.  
No curing required.

**Coating System** VHT provides a high performance coating for the ultimate in protection and quality.

<b>Coat</b>	SPXXX	Roll Bar Color
-------------	-------	----------------

Gloss Black  
SP670  
0-10155-00670-3



Satin Black  
SP671  
0-10155-00671-0



## VHT STRIP FAST™

VHT Strip Fast™ Paint Remover is the absolute best paint remover on the market today. This extremely effective formula bubbles and removes lacquers, enamels, acrylics, varnishes and oils from metal and wood. Used by many championship race teams and restorers.

11 oz can — Case pack: 6

**Temperature:** n/a

**Applications:** Suspension and chassis parts, Race car body panels (metal only), Painted engine components, Shop items, Household items, Any wood or metal surface


**Finish:** n/a

**Dry Time:** n/a

**Coating System** VHT provides a high performance coating for the ultimate in protection and quality.

<b>Coat</b>	SP575	Strip Fast
-------------	-------	------------

Strip Fast™  
SP575  
0-10155-00575-1

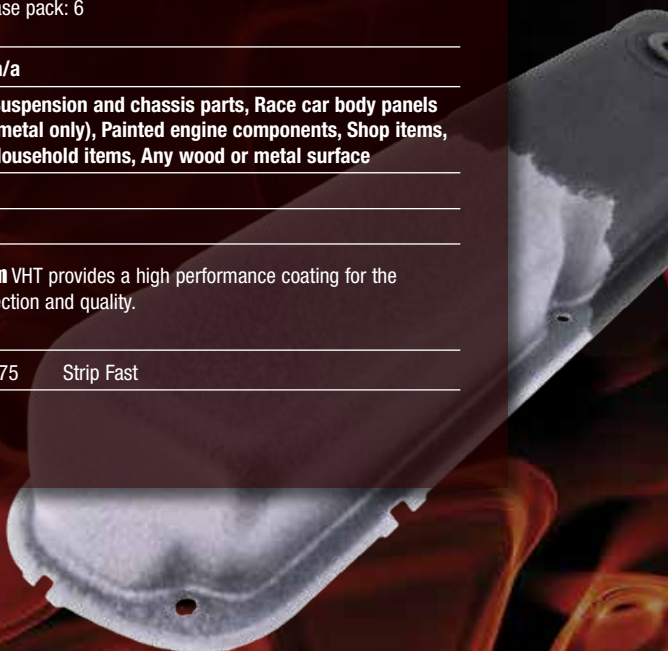

**RUST CONVERTOR**  
**SP229**  
 0-10155-36876-4



## VHT RUST CONVERTOR

VHT Rust Convertor destroys rust on contact. It sprays on clear and turns to a black metal-protecting coating to prevent future rust from forming. Specifically formulated for application over metal, body filler or fiberglass, Rust Convertor sands to a smooth, even finish.

11 oz can — Case pack: 6

**Temperature:** n/a

**Applications:** Rusted Metal Surfaces

**Finish:** Flat

**Dry Time:** Allow 24 hours before applying top coat.

**Coating System** VHT provides a high performance coating for the ultimate in protection and quality.

<b>Coat</b>	SP229	Rust Convertor
-------------	-------	----------------

**Gloss Black**  
**SP650**  
 0-10155-00650-5

**Gloss White**  
**SP651**  
 0-10155-00651-2

**Satin Black**  
**SP652**  
 0-10155-00652-9



## VHT EPOXY ALL WEATHER PAINT

VHT Epoxy Paint is a one-step epoxy coating, which does not require the use of a primer. It has been formulated to give the appearance and durability of a baked-on finish. It provides a porcelain-like finish that is chemical, corrosion, rust and salt resistant.

11 oz can — Case pack: 6

**Temperature:** 250°F (121°C)

**Applications:** Suspension, Kick Panels, Tools

**Finish:** Gloss and Satin

**Dry Time:** Dries to the touch in 30 mins.

Dries thoroughly overnight.

No curing required.

**Coating System** VHT provides a high performance coating for the ultimate in protection and quality.

<b>Coat</b>	SPXXX	Epoxy Color
-------------	-------	-------------

## VHT HOOD, BUMPER & TRIM PAINT

VHT Hood, Bumper & Trim urethane coating is formulated with elastomers that allow for the flexing of paint on pliable surfaces. This unique formula is also well suited for fiberglass, plastic and other resin based bodywork. Equally suited for metal. VHT Hood, Bumper & Trim Paint offers excellent hide and mar resistance.

11 oz can — Case pack: 6

**Temperature:** n/a

**Applications:** Plastic Bumpers, Rubber Bumpers, Body Trim, Kick Panels, Dash Boards, Mirror Castings, ATV Body Work, Motorcycle Body Work

**Finish:** Satin

**Dry Time:** Dries to the touch in 30 minutes.  
Dries thoroughly overnight.  
No curing required.

**Coating System** VHT provides a high performance coating for the ultimate in protection and quality.

**Coat** SP27 Black

Black  
SP27  
0-10155-00027-5



# VHT Plate Finish

## VHT PLATE FINISH™

VHT Plate Finish™ is a unique quick drying formulation specifically created for application on metal, glass, and wood or sealed plaster surfaces. This non-tarnishing epoxy finish has outstanding corrosion resistance. VHT Plate Finish™ is easy to use and dries in minutes. Excellent for touch-up, refinishing and decorative applications.

11 oz can — Case pack: 6

**Temperature:** n/a

**Applications:** Instrumentation, Picture Frames, Tail Light reflectors, Pottery, Lamps, Outdoor Lighting

**Finish:** High Gloss

**Dry Time:** Dries to the touch in 30 mins.  
Dries thoroughly overnight.  
No curing required.

**Coating System** VHT provides a high performance coating for the ultimate in protection and quality.

**Coat** SP5251 Chrome Plus

Chrome Plus  
SP5251  
0-10155-05251-9



■ Lens Cover Tint  
SP999  
0-10155-00999-5

■ Nite Shades Red  
SP888  
0-10155-00003-9

## VHT NITE-SHADES™

VHT Nite-Shades™ is a transparent black tail light lens coating for creating a custom European styling. When applied to tail lights, fog lights or turn indicators, VHT Nite-Shades™ appears black until they are lit, then the natural red color appears. Recommended for off road use. Warning: Once applied to plastic lens, SP999 is not able to be satisfactorily removed.

10 oz can — Case pack: 6

---

**Temperature:** n/a

---

**Applications:** Tail Lights, Fog Lights, Turn Indicators

---

**Finish:** Gloss

---

**Dry Time:** Dries to the touch in 1 hour.  
Dries thoroughly overnight.  
No curing required.

---

**Coating System** VHT provides a high performance coating for the ultimate in protection and quality.

---

<b>Coat</b>	SPXXX	Nite-Shades™
-------------	-------	--------------

---



VHTlak.nl



## VHT VINYL DYE™

VHT Vinyl Dye™ for vinyl and carpeting restores or changes the color of any vinyl upholstery, seats and trim, or the “short nap” carpeting found in today’s cars, boats and watercraft. It is ideal for use on stiff or pliable vinyl, simulated leather or plastic. It is extremely resistant to cracking or fading. Careful preparation is essential and all traces of dirt, silicone products, vinyl and rubber protectants, oils and greases must be removed. Incomplete preparation will not produce a satisfactory result.

11 oz can — Case pack: 6

**Temperature:** n/a

**Applications:** Carpet, Vinyl Dashboards, Vinyl Seats, Trunk Carpet, Soft Tops, Untreated Leather

**Finish:** Gloss & Satin

**Dry Time:** Dries to the touch in 30 minutes.  
Dries thoroughly overnight.  
No curing required.

**Coating System** VHT provides a multi-high performance coating for the ultimate in protection and quality. The system includes surface preparation and paint.

**Coat** SPXXX Vinyl Dye™ Color

Gloss Jet Black  
SP941  
0-10155-00941-4



White Satin  
SP943  
0-10155-00943-8



Black Satin  
SP942  
0-10155-00942-1



Buckskin Tan Satin  
SP944  
0-10155-00944-5



Silver Satin  
SP946  
0-10155-00946-9



Gloss White  
SP949  
0-10155-47805-0



Dark Blue Satin  
SP950  
0-10155-00950-6



Light Gray Satin  
SP953  
0-10155-00953-7



Charcoal Gray Satin  
SP954  
0-10155-00954-4



Desert Sand Satin  
SP961  
0-10155-47808-1



Gloss Red  
SP962  
0-10155-47810-4



# VHT lak.nl

## VHT COPPER GASKET CEMENT

VHT Copper Gasket Cement has been formulated with the same ingredients as our world-renowned high temperature coatings. VHT Copper Gasket Cement maintains excellent adhesion under severe pressure and heat fluctuations. This high metallic formula assures tight seals on cork, paper and metal gaskets. VHT Copper Gasket Cement has been extensively tested on racing engines in the field and on dynamometers, where it has met and exceeded the high compression and high temperature requirements of these mega horsepower engines.

12 oz can — Case pack: 6

**Temperature:** n/a

**Applications:** Head Gaskets, Rubber Hoses, Cork Gaskets, Water Pump Gaskets, Threaded Fittings, AN Fittings, Paper Gaskets, Oil Pan Gaskets, Metal Gaskets

**Coating System** VHT provides a high performance coating for the ultimate in protection and quality.

**Coat** SP21A Copper Gasket

Copper Gasket  
SP21A  
0-10155-04456-9






 White  
SP301  
0-10155-00301-6


 Dark Gray  
SP302  
0-10155-00302-3

 Red Oxide  
SP303  
0-10155-00303-0

 Light Gray  
SP304  
0-10155-00304-7

 Black  
SP305  
0-10155-00305-4

 Yellow Zinc Chromate  
(For Aluminum)  
SP306  
0-10155-00306-1

 Self-Etching Primer  
SP307  
0-10155-49254-4



## VHT PRIME COAT™

VHT Prime Coat™ is an excellent foundation for any enamel, acrylic or synthetic lacquer. It provides a tough, air-dry base with excellent adhesion to intermediate and top coatings. VHT Prime Coat is specially formulated to fill scratches or pin holes caused by sanding or body fillers to form a strong corrosion barrier. It is a multi-purpose product, and can be used on metal, fiberglass, masonry, wood and most plastic surfaces. It is ideal for automotive, marine, aviation, home, farm, and industrial use.

11 oz can — Case pack: 6

**Temperature:** n/a

**Applications:** Before Paint Coating, Fills in small scratches, Increases bond

**Finish:** Flat


**Dry Time:** Primer will dry in 30-45 minutes for sanding purposes.


**Coating System** VHT provides a multi-high performance coating system for the ultimate in protection and quality. The system includes Strip Fast™ and Prime Coat™.


**Prep** SP575 Strip Fast™


**Prime** SPXXX Prime Coat™ Color


 Fire Red  
SP501  
0-10155-00501-0


 Bright Orange  
SP503  
0-10155-00503-4

 Gloss Black  
SP504  
0-10155-00504-1


 Ocean Blue  
SP505  
0-10155-00505-8


 Bright Aluminum  
SP507  
0-10155-00507-2

 Bright Yellow  
SP508  
0-10155-00508-9

 Gloss White  
SP509  
0-10155-00509-6


 Flat Black  
SP510  
0-10155-00510-2

 Forest Green  
SP512  
0-10155-00512-6

 Machinery Gray  
SP513  
0-10155-00513-3

 Clear  
SP515  
0-10155-00515-7

 Silver Chrome  
SP525  
0-10155-00525-6

 Satin Black  
SP527  
0-10155-00001-5



## VHT QUICK COAT™

VHT Quick Coat™ Enamel is a premium quality coating, which provides extra hide and durability for interior or exterior applications. This tough and durable coating prevents rust and corrosion on properly prepared surfaces, is fast drying, lead free and ozone safe. VHT Quick Coat™ Enamel provides a rich weather resistant gloss finish to wood, metal, sealed plaster and masonry surfaces.

11 oz can — Case pack: 6

**Temperature:** n/a

**Applications:** Tools, Wood, Household Projects

**Finish:** Satin, Gloss and Flat

**Dry Time:** Dries to the touch in 30 mins.  
Dries thoroughly overnight.  
No curing required.

**Coating System** VHT provides a multi-high performance coating system for the ultimate in protection and quality. The system includes primer, paint and clear coat.

**Prime** SPXXX Prime Coat™ Color

**Coat** SPXXX Quick Coat™ Color

**Clear** SP515 Quick Coat™ Clear

## VHT BLACK OXIDE CASE PAINT

VHT Black Oxide Case Paint is a satin finish high temperature coating developed specifically for 2 and 4-stroke motorcycle engines. It is petrol and solvent resistant, and virtually stops rust and corrosion, even in severe weather conditions.

11 oz can — Case pack: 6

**Temperature:** 550°F (288°C)

**Applications:** Small Motorsports Engines

**Finish:** Satin

**Dry Time:** Dries to the touch in 30 mins.  
Dries thoroughly overnight.

## CURING BLACK OXIDE CASE PAINT

VHT Black Oxide Case Paint only attains its unique properties after correct curing.

- The inherent heat of engine operation will accomplish curing.

## COATING SYSTEM

Coating System VHT Provides a multi-high performance coating system for the ultimate in protection and quality. The system includes surface preparation, primer, paint and clear coat.

Prep	SP575	Strip Fast
Prime	SP148	Engine Primer
Paint	SP903	Case Paint
Clear	SPXXX	Engine Clear

Satin Black  
SP903  
0-10155-00903-2



## VHT BARREL PAINT

VHT Barrel Spray Paint is custom formulated to restore motorcycle engines to their original factory appearance. It is extremely resistant to oil, petrol and solvents, and is heat resistant to 550°F (288°C). It virtually stops rust and corrosion while resisting chipping, cracking and fading.

11 oz can — Case pack: 6

**Temperature:** 550°F (288°C)

**Applications:** Small Motorsport Engines

**Finish:** Gloss, Satin

**Dry Time:** Dries to the touch in 30 mins.  
Dries thoroughly overnight.

## CURING BARREL PAINT

VHT Barrel Paint only attains its unique properties after correct curing.

- The inherent heat of engine operation will accomplish curing.

## COATING SYSTEM

Coating System VHT Provides a multi-high performance coating system for the ultimate in protection and quality. The system includes surface preparation, primer, paint and clear coat.

Prep	SP575	Strip Fast
Prime	SP148	Engine Primer
Paint	SPXXX	Barrel Paint
Clear	SPXXX	Engine Clear

Gloss Black  
SP905  
0-10155-00905-6



Satin Black  
SP906  
0-10155-00906-3



# HIGH HEAT JUST GOT HOTTER AT VHTPAINT.COM

You'll always find something new at vhtpaint.com...new products, new promotions, and now The Winner's Circle. Share your VHT success stories in The Winner's Circle, or read up on the successes other DIYers have had using VHT products on their motorcycles, cars, trucks, ATV's, and other vehicles. Check it out today!



VHTlak

